

LEXRON

FOR A LIVEABLE WORLD

HALF CUT

144 CELL

N-TYPE MONOCRYSTALLINE MODULE

680-700W

POWER OUTPUT RANGE

23.23%

MAXIMUM EFFICIENCY

0~+5W

BINNING TOLERANCE

10BB/16BB

MULTI BUSBAR

N-TYPE MODULES WITH TOPCON


TECHNOLOGY

SYSTEM CERTIFICATES

IEC61215/IEC61730/IEC61701/IEC62716
ISO 9001: Quality Management System
ISO 14001: Environmental Management
ISO 45001: Occupational Health and Safety

LEXRON

FOR A LIVEABLE WORLD

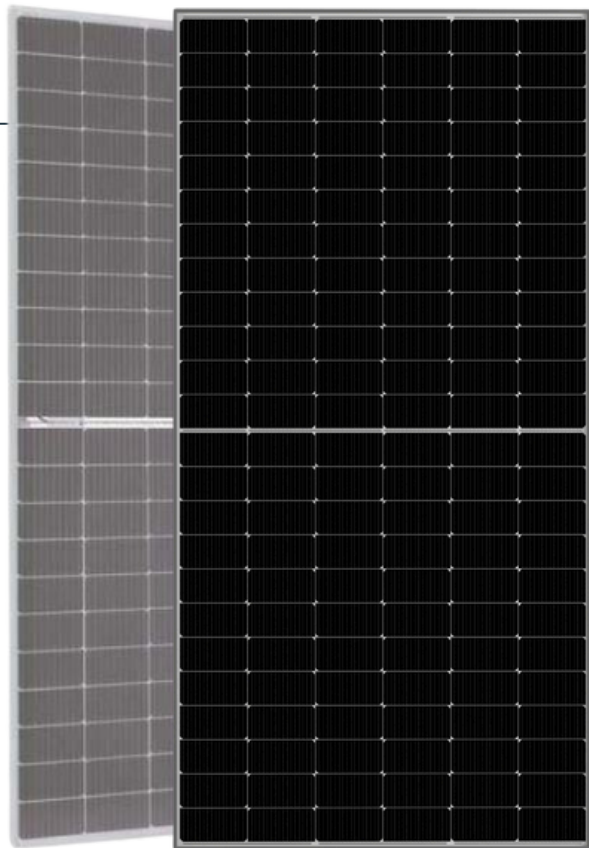

N-TYPE TECHNOLOGY

N-type modules with TOPcon technology offer lower LID/LeTID degradation and better low light performance.



POSITIVE TOLERANCE

Guaranteed 0- +5W positive power output tolerance ensures high reliability



SELF CLEANING

Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust



STRONG AIR RESISTANCE


Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal)*



HIGH PERFORMANCE


Excellent performance under low light environments (mornings, evenings and cloudy days)

Industry-leading warranty

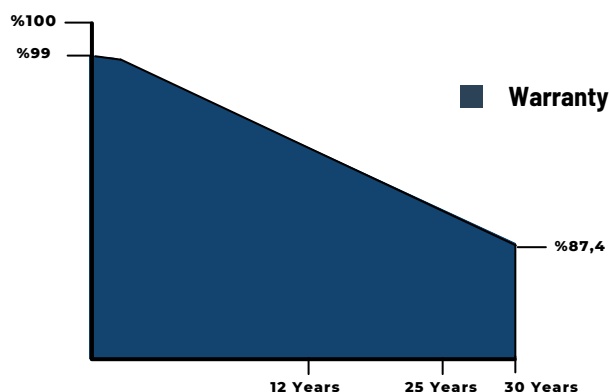


144 CELL HALFCUT TOPCON DATASHEET


DIMENSIONS OF PV MODULE(mm)

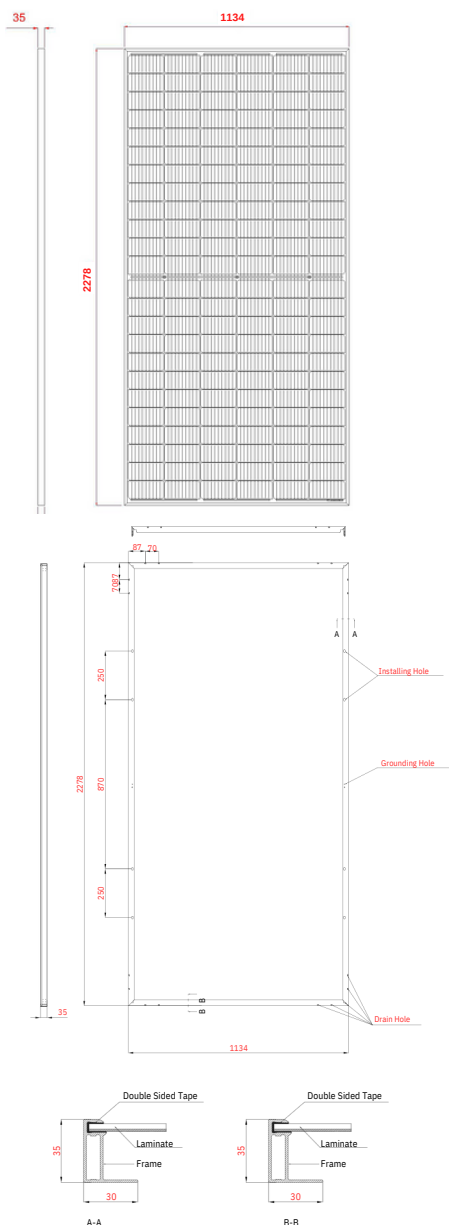

I-V CURVES OF PV MODULE(600W)



P-V CURVES OF PV MODULE(600W)

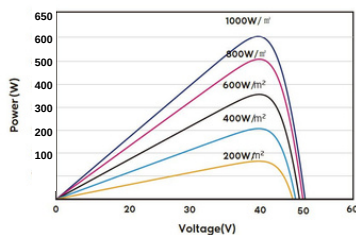

ELECTRICAL DATA (STC)

Nominal Maximum	575W	580W	585W	590W	595W	600W
Open CIRCUIT Voltage (Voc)	51,12V	51,30V	51,48V	51,72V	51,90V	52,08V
Max Power Voltage (Vmp)	42,60V	42,75V	42,90V	43,10V	43,25V	43,40V
Short Circuit Current(Isc)	14,24A	14,31A	14,38A	14,44A	14,51A	14,58A
Max Power Current (Imp)	13,50A	13,57A	13,64A	13,69A	13,76A	13,82A
Module Efficiency	22,26%	22,45%	22,65%	22,84%	23,03%	23,23%
Operating Temperature	-40°C~+85°C					
Maximum System Voltage	1500V (IEC)					
Maximum Series Fuse Rating	30A					
Application Classification	Class A					
Power Tolerance (%)	±3					

STC: Irradiance 1000W/m2, Cell Temperature 25°C, Air Mass AM1.5.
*Measuring tolerance: ±3%.

MECHANICAL DATA

Cell Type	N -type Mono-crystalline
Cell Arrangement	144 cell
Dimensions	2278 x 1134 x 35 mm
Weight	28kg
Front Cover	3.2mm, AR Coated Heat Strengthened Glass
Frame Material	35mm Anodized Aluminum Alloy
J-BOX	IP68 rated
Cable	Photovoltaic Technology Cable 4.0mm2
Connectors	MC4 EVO2 or MC4 Compatible
Standard Packaging (Modules per Pallet)	33pcs
Module Pieces per container (40')	660pcs

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

Maximum Power (Pmax) (Wp) %5	627	633	638	644	649	660
Module Efficiency STC (%) %5	24,27%	24,48%	24,70%	24,91%	25,12%	25,55%
Maximum Power (Pmax) (Wp) %10	684	690	696	702	708	720
Module Efficiency STC (%) %10	26,48%	26,71%	26,94%	27,18%	27,41%	27,87%
Maximum Power (Pmax) (Wp) %15	741	748	754	761	767	780
Module Efficiency STC (%) %15	28,68%	28,94%	29,19%	29,44%	29,69%	30,20%

TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45±3°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.250%/°C
Temperature Coefficient of Isc	0.048%/°C

WARRANTY

- 12 year Product Workmanship Warranty
- 30 year Power Warranty
- 1% first year degradation
- 0.40% Annual Power Attenuation

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Lexron Brand reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.